



e-style pro

Ultra-Slim wall axial fans
Wall and ceiling installation



Comply with ErP Directive 2009/125/CE
and EU Regulation 1253/2014
Classification: Residential Ventilation Unit





PERFORMANCE

MODELS	m³/h	l/s	Pa	W	dB (A)*
E-STYLE 90	80	22	23	10	30,1
E-STYLE 100	95	26	42	14	31,4
E-STYLE 120	165	46	55	15	36,7
E-STYLE 150	315	87	71	25	43,9

* Lp(A) measured at 3m in open field 230V-50Hz.

CURVES

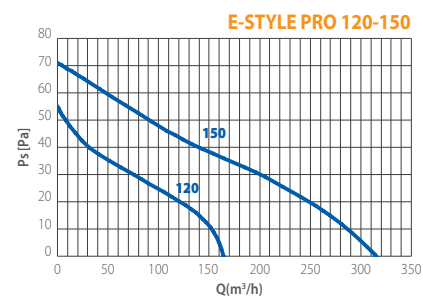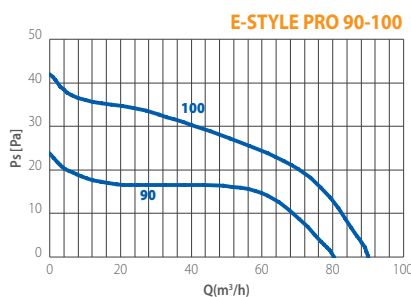

ULTRA SLIM

17 mm

- To exhaust air directly to the outside or into a short length ducting (max 3 m length).
- Suitable for toilets, bathrooms, WC's, shower-rooms, utility rooms and kitchens.
- Provided with back draught shutters on models 100, 120, 150
- Neon running light
- Style, technology

VERSIONS



BASE - On/off through light or remote control switch.



TIMER - Integral electronic timer adjustable from 3 to 25 minutes.



MHT - Humidity control, adjustable from 40 to 80% of R.H. and Timer adjustable from 3 to 25 mm.




MHY - Smart Humidity control automatic progressive increase/decrease of fan speed according to the percentage of R.H.




SELV - SELV 12 V a.c. (for size 100 only)

INSTALLATION




WALL

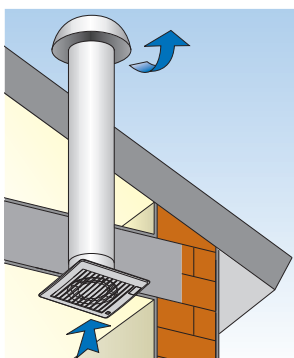

CEILING

DIMENSIONS (mm)

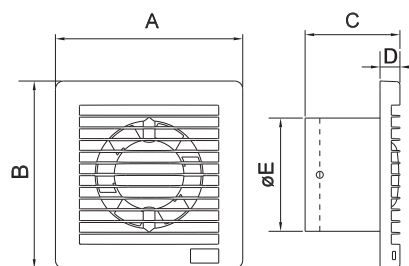

MODELS	A	B	C	D	EØ	Kg
E-STYLE 90	160	160	81	17	92	0,4
E-STYLE 100	160	160	95	17	98	0,4
E-STYLE 120	180	180	101	18	119	0,6
E-STYLE 150	200	200	119	22	149	1,0

ACCESSORY

CHROME



INOX SATIN



Upon request and according to minimum batches