



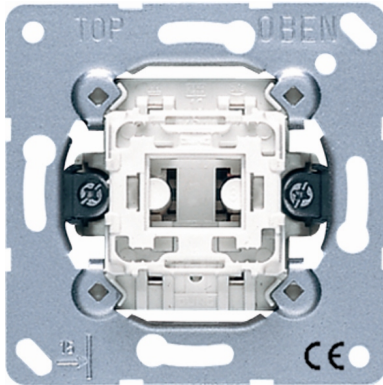


Description: 1-gang switch insert (1-pole, 2-way)

Ref.-no.: 506 U

illumination possible with lamp

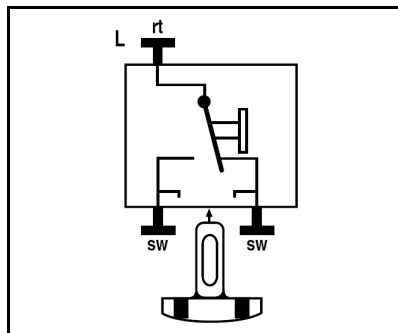

Contact assignments

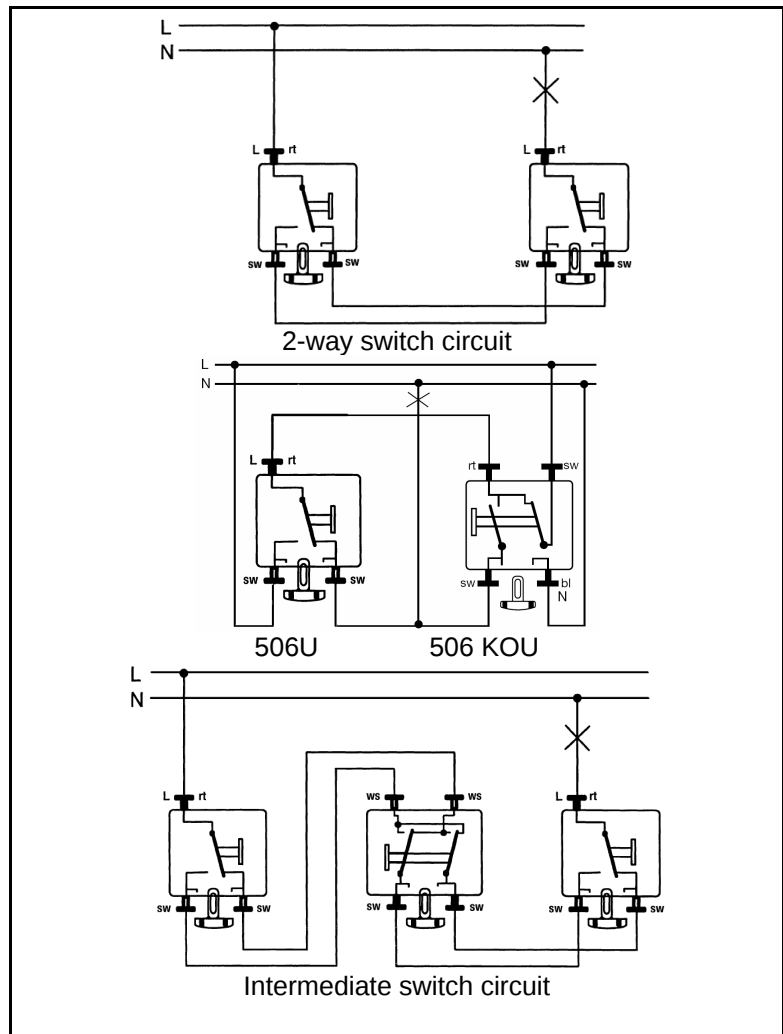

Wiring diagrams  
506 U

## Technical data

|                    |                     |
|--------------------|---------------------|
| Switching voltage: | AC 250 V ~          |
| Switching current: | 10 AX               |
| Connection:        | screwless terminals |
| Switch type:       | 1-pole, 2-way       |

## Accessories

|       |                               |
|-------|-------------------------------|
| Lamp: | Ref.-no.: 90 (230 V, 1.1 mA)  |
|       | Ref.-no.: 95 (230 V, 0.5 mA)  |
|       | Ref.-no.: 96-12 (12 V, 40 mA) |

Ref.-no.: 96-24 (24 V, 25 mA)  
Ref.-no.: 96-36 (36 V, 20 mA)  
Ref.-no.: 96-48 (48 V, 25 mA)

LED-lamp: Ref.-no.: 961248 LED RT (rot 12 – 48 V, ca. 4 mA)  
Ref.-no.: 961248 LED GN (grün 12 – 48 V, ca. 4 mA)  
Ref.-no.: 90-LED RT (rot 230 V, ca. 1.1 mA)  
Ref.-no.: 90-LED GN (grün 230 V, ca. 1.1 mA)