


Pendant Luminaires | 220-240 V
84 topLED 34 W DC - 37 W AC | CRI 80
8890

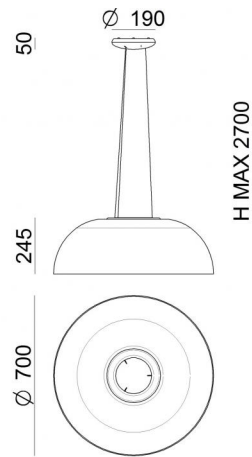

EAC
 CE
 


 C.C.
 
 IP20
 

Technical data	
Designer	Mirco Crosatto
Construction year	2019
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Total Power	37 W
Source lumens	4198 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI - PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2500 m
Resin potting	No
Type of light emission	Double emission
Net weight	4,100 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Optilight TM

Finishing casing	
Material	Die-cast Aluminium
Colour	Embossed white RAL 9003
Processing	Powder coating
Finishing diffuser	
Colour	transparent
Processing	Laser engravings
Finishing mounting frame	
Material	metal
Colour	Embossed white RAL 9003
Processing	Coating
Cables Pendant Luminaires	
Max cable length	2500 mm

Pendant Luminaires | 220-240 V | 84 topLED 34 W DC - 37 W AC | CRI 80 | Base 8890



Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 84 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 4198 lm, with a 123.5 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium and features a embossed white ral 9003 finish, processed by means of powder coating; the diffuser is made with a laser engravings treatment; the mounting frame is made of metal, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 4,100 kg.

The total absorbed power is 37 W. The power supply cable is included and features a 2500 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

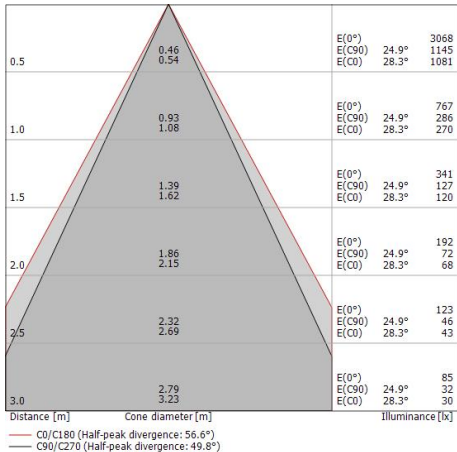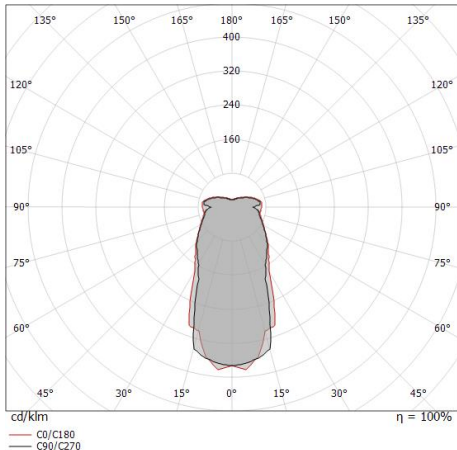

Energy efficiency class

This product contains 3 light sources of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	48 %
Source lumens	4198 lm
Delivered lumens	2051 lm
Consumption	37 W
Luminaire efficacy	55 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio


L70 B20 C0 72500h (at Tj 115 Ta 25)

UGR

UGR axial	17.3
UGR transversal	17.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	50°
C0/C180 optics	57°
Light distribution simmetry	Symmetrical 2 assis



Dimmer
Bluetooth, 220-240V

Code
KIT0079